

Assembly Instructions

Model:	KLE650E/F, KLZ1000B
Description:	DC Output Kit
Part Number:	99994-0485

Before you begin, read through these instructions and check that all parts are present. Please note that Kawasaki cannot assume any responsibility for damage resulting from incorrect installation.

Kawasaki recommends that all genuine accessories should be fitted by an authorized Kawasaki dealer.


The following symbol indicates the information for proper installation and operation in this instruction.

NOTE : NOTE indicates information that may help or guide you in the operation or service of the vehicle.

(KLE650E/F) Refer to the Service Manual (P/No.: 99924-1490-01) for detailed procedures.

(KLZ1000B) Refer to the Service Manual (P/No.: 99924-1478-01) for detailed procedures.

Parts List				
No.	Component Name	Part No.	Qty	Remark
1	Socket	13151-0566	1	

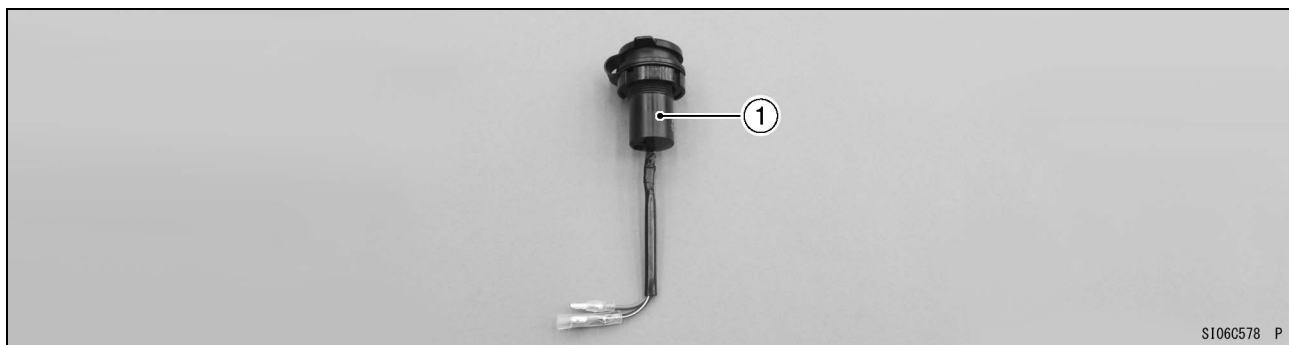

S1060578 P

Installation Instructions





Assembly Procedure (KLE650E/F)

- Remove:
 - Inner Cover (Refer to the Service Manual)
 - Socket Cover Screw [A]
 - Bracket [B]
 - Socket Cover [C]
- Install the socket [1] so that the projection [A] fits the groove [B] of the meter cover.
- Tighten the nut [A].
Torque – 12 V Socket Nut: 2.8 N·m (0.29 kgf·m, 25 in·lb)
- Remove the tape [A] to free the connectors [B].
- Free the accessory lead [C] from the clamp [D].

- Connect the connectors [A] to the main harness.
- Install:
 - Inner Cover (Refer to Service Manual)

NOTE

○ Do not pinch the socket leads with the inner cover.

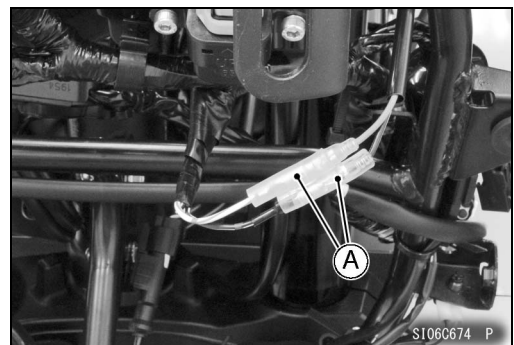
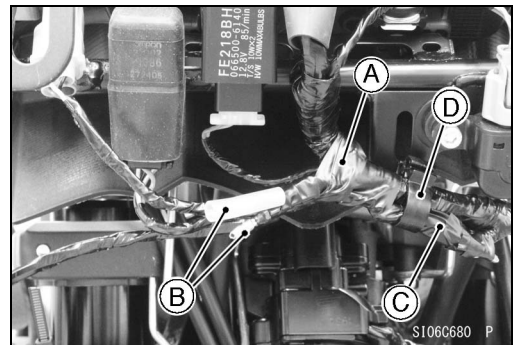
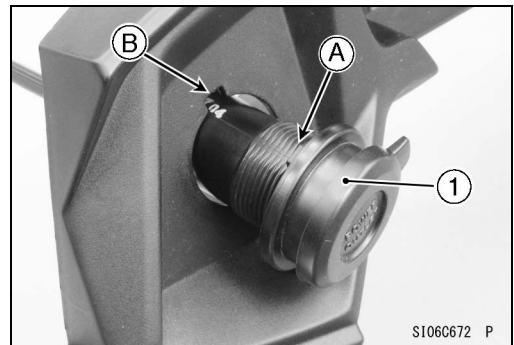
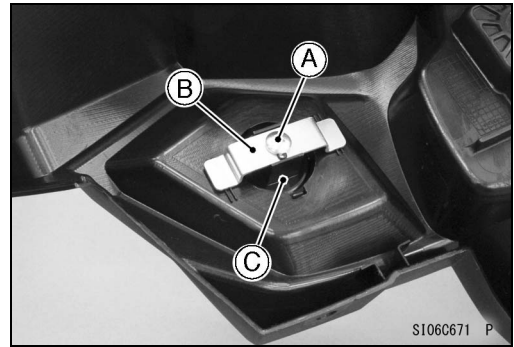


Assembly Procedure (KLZ1000B)

- Remove:
 - Meter Cover (Refer to the Service Manual)
 - Socket Cover Screw [A]
 - Bracket [B]
 - Socket Cover [C]
- Install the socket [1] so that the projection [A] fits the groove [B] of the meter cover.
- Tighten the nut [A].
Torque – 12 V Socket Nut: 2.8 N·m (0.29 kgf·m, 25 in·lb)
- Connect the connectors [A] to the main harness.
- Install:
 - Meter Cover (Refer to Service Manual)

NOTE

○ Do not pinch the socket leads with the meter cover.

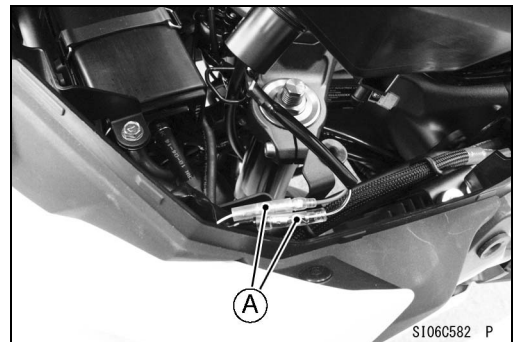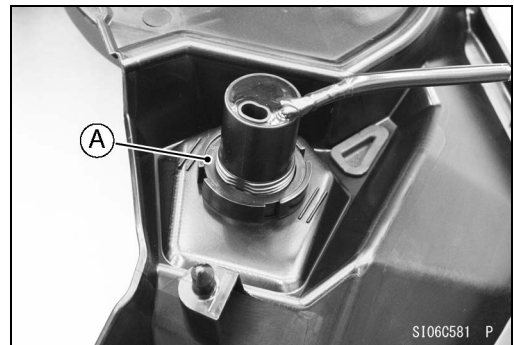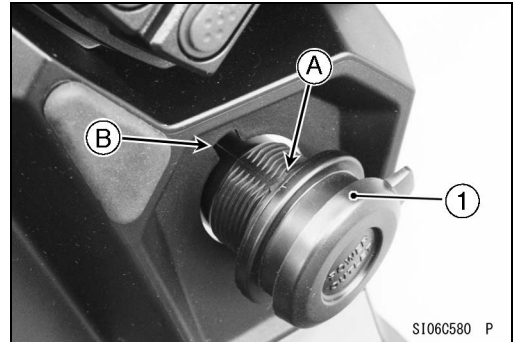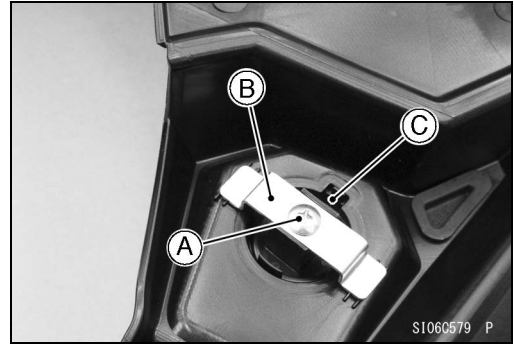

Operation Manual

Model:	KLZ1000B
Description:	DC Output
Part Number:	-

Thank you for your purchase. This manual contains information for proper operation of the accessory parts and precautions. Read through this manual before operation for proper use of the accessory parts.


The following symbol indicates the information for proper installation and operation in this instruction.

NOTICE

: NOTICE is used to address practices not related to personal injury.

DC Output Operation

- The electric power of the battery can be used through the electric accessory socket [A].

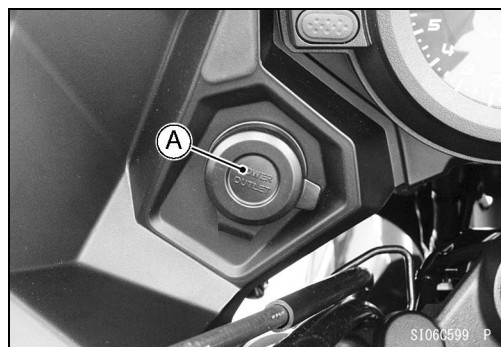

NOTICE

If using an accessory in the socket, unless it has a waterproof connection do not operate this motorcycle in the rain or wash it. Always put the cap on the socket when the accessory is not used.

NOTICE

The vehicle has electrical accessory circuit (7.5 A fuse) for the socket. Always install a fuse 7.5 A or less for the circuit. Do not connect more than 56 W of total load to the vehicle's electrical system or the battery may become discharge, even with the engine running.